



Contact NavtechGPS for product details. [www.NavtechGPS.com](http://www.NavtechGPS.com)  
+1-703-256-8900 • 800-628-0885 • [info@navtechgps.com](mailto:info@navtechgps.com)

When precision matters...™



## TW4039B Low Gain GPS Antenna

The TW4039B are very low power, compact GNSS antennas covering the GPS L1, frequency band. This antenna features an LNA with constant performance from 2.7V to 5.5V supply voltage, and includes protection against close-proximity 700MHz LTE and L-band transmitting antennas.

The TW4039B provide a minimum gain of 16dB and excellent noise figure. The TWTW4039B patch has 40% wider bandwidth for better axial ratio and has 15 KV ESD circuit protection. The LNA has a +/- 10MHz bandwidth that covers the full GPS L1 signal plus the SBAS (WAAS/EGNOS/MSAS) frequency band (1572.5 to 1578 MHz).

The TW4039B provides a “Brick-Wall” pre-filter to protect against saturation by high level sub-harmonics and L-Band signals.

It is housed in a compact IP67 magnetic mount enclosure.

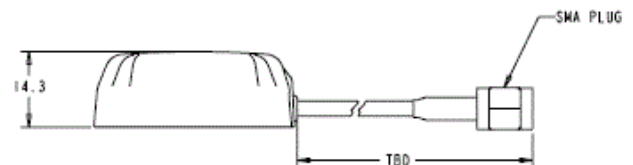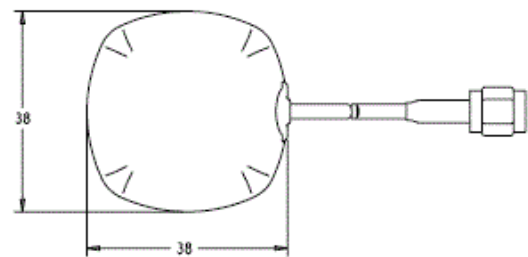

### Applications

- Battery operated monitoring
- Covert Surveillance
- Fleet Management & Asset Tracking
- Satcom based AVL solutions

### Features

- Invariant response, 2.7 to 5.5 VDC Supply
- Low Noise Figure 2.0dB
- Axial ratio: 4 dB max (GPS)
- Min Gain: 16dB
- IP67 weather proof housing

### Benefits

- Excellent signal to noise ratio
- RoHS compliant
- Ideal for harsh environments
- Excellent out of band signal rejection



# TW4039B Low Power GPS Antenna

## Specifications Vcc = 3V, over full bandwidth, T=25°C

### Antenna

Architecture	Wideband Single Feed Patch
1 dB Bandwidth	31 MHz
10dB Return Loss Bandwidth	45MHz
Antenna Gain (with 100mm ground plane)	4.5 dBic
Axial Ratio over Bandwidth (at zenith and F <sub>center</sub> )	4dB
Polarization	RHCP

### Electrical

Architecture	Patch -> SAW-> LNA
Gain @ 1575.42 MHz	16dB min
Gain flatness	+/- 2 dB
Out-of-Band Rejection	<1500 MHz >30 dB >1640 MHz >28 dB
VSWR (at LNA output)	<1.5:1 typ. 1.8:1 max.
Noise Figure	2.0 dB typ.
Supply Voltage Range (over coaxial cable)	+2.7 to 5.5 VDC
Supply Current	7mA typ
ESD Circuit Protection	15 KV air discharge

### Mechanicals & Environmental

Mechanical Size	38mm x 38mm dia. x 14.3mm H
Cable	RG174
Operating Temp. Range	-40 to +85 °C
Enclosure	Radome and base: EXL9330
Weight	73g ( enclosure 34gm, 3m cable 39gm)
Attachment Method	Magnetic
Environmental	IP67 and RoHS compliant
Shock	Vertical axis: 50 G, other axes: 30 G
Vibration	3 axis, sweep = 15 min, 10 to 200 Hz sweep: 3 G

### Ordering Information

Part Numbers:

TW4039B – Prefiltered Wideband GPS Antenna

33-4039B-xx-yyyy

Please refer to the Ordering Guide( <http://www.tallysman.com/wp-content/uploads/Current-Ordering-Guide.pdf>) for the current and complete list of available radomes and connectors.



36 Steacie Drive, Ottawa ON K2K 2A9 Canada

Tel 613 591 3131 Fax 613 591 3121

[sales@tallysman.com](mailto:sales@tallysman.com)

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind. © 2018 Tallysman Wireless Inc. All rights reserved.

V1.1